



## Coreless melt-blown filter bag

Eaton's MAX-LOAD coreless filter bags with melt-blown media offer solutions to a wide range of applications, such as water treatment, bulk and fine chemicals, metal cleaning and many more.

MAX-LOAD coreless filter bags are manufactured from melt-blown media. Combined in a multi-graded configuration they provide an excellent dirt holding capacity. The rigid structure with a total media depth greater than 18 mm, provides a barrier to hard and metallic as well as deformable gel-type contaminants.

### Features and benefits

- Rigid graded media structure with a total depth greater than 18 mm
- Available in polypropylene and polyester with matching end caps and seal rings to cover most processing conditions
- Fits in all Eaton standard size 01 and 02 restrainer baskets
- Produced through silicon-free process and procedure<sup>1</sup>
- Patented SENTINEL® seal ring provides bypass-free filtration

- Thermobonded endcaps provide a strong, bypass-free and a seamless construction
- Outer seamless spunbond cover structure limits fiber migration to a bare minimum
- Optionally available with additional polyamide 6.6 outer mesh cover in 10 µm for extra safety in highly intermittent operating conditions

### Filter specifications

#### Materials

Polypropylene or polyester melt-blown media

#### Seal rings

SENTINEL ring with endcaps in polypropylene or polyester copolymer

#### Retention ratings

1, 5, 10, 20, 50, 100 and 150 µm

### Dimensions/Parameters

#### Sizes

01: Ø 180 x 345 mm L  
02: Ø 180 x 730 mm L

#### Filter area

01: 0.15 m<sup>2</sup>  
02: 0.30 m<sup>2</sup>

#### Max. operating temperature

Polypropylene: 90 °C  
Polyester: 135 °C

#### Max. differential pressure

2.5 bar

#### Recommended change-out pressure for disposal<sup>2</sup>

0.8 – 1.5 bar

#### Max. flow rates<sup>3</sup>

01: 12.5 m<sup>3</sup>/h  
02: 25.0 m<sup>3</sup>/h

### FDA/EC conformity

All polypropylene materials used in manufacturing comply with the regulations of the Food and Drug Administration (FDA), title 21 of the Code of Federal Regulations Section 177, and EC Regulations 1935/2004 and EC Directive 10/2011, as applicable for food and beverage contact.



Powering Business Worldwide

# MAX-LOAD Coreless Filter Bag Range



**Endless fiber structure limits fiber migration at a bare minimum**



**Graded media structure yields gradual loading**




**Optional polyamide 6.6 mesh cover in 10 µm forms a protective outer shield**



**Bypass-free sealing through SENTINEL seal ring**

## Ordering information

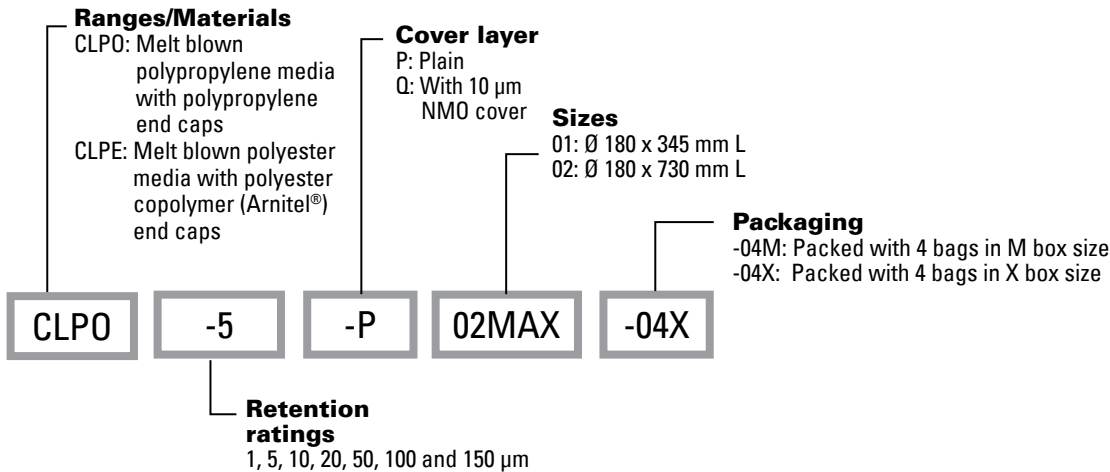

<sup>1</sup> Based on an accepted paint compatibility test (see document QUC-STA-10).

<sup>2</sup> Depending on the respective application requirements.

<sup>3</sup> For liquids with a dynamic viscosity of 1 mPa·s @ 20 °C.

**North America**  
 44 Apple Street  
 Tinton Falls, NJ 07724  
 Toll Free: 800 656-3344  
 (North America only)  
 Tel: +1 732 212-4700

**China**  
 No. 3, Lane 280,  
 Linhong Road  
 Changning District, 200335  
 Shanghai, P.R. China  
 Tel: +86 21 5200-0099

**Europe/Africa/Middle East**  
 Auf der Heide 2  
 53947 Nettersheim, Germany  
 Tel: +49 2486 809-0

**Singapore**  
 100G Pasir Panjang Road #07-08  
 Singapore 118523  
 Tel: +65 6825-1668

Friedensstraße 41  
 68804 Altlußheim, Germany  
 Tel: +49 6205 2094-0  
 An den Nahewiesen 24  
 55450 Langenlonsheim, Germany  
 Tel: +49 6704 204-0

**Brazil**  
 Rua Clark, 2061 - Macuco  
 13279-400 - Valinhos, Brazil  
 Tel: +55 11 3616-8400

**For more information, please email us at [filtration@eaton.com](mailto:filtration@eaton.com) or visit [www.eaton.com/filtration](http://www.eaton.com/filtration)**

© 2018 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.

US  
 EF-FTB-21  
 05-2018