

## Depth Filtration

### BECO PROTECT® PP Pure

#### Depth Filter Cartridges

BECO PROTECT PP Pure depth filter cartridges are designed for pre- and fine filtration of many types of beverages, liquid food, cosmetics, fine chemicals and process water. This filter cartridge provides high flow due to pleated polypropylene filter material.

#### Features and Benefits

- Large effective filter area through pleated filter material
- High retention for a reliable separation effect,  $\beta$  ratio  $\geq 5000$  or  $\geq 99.98\%$  efficiency for defined particles
- High chemical resistance through use of 100% polypropylene

#### Configuration

BECO PROTECT PP Pure depth filter cartridges are made from high-quality, pleated polypropylene layers. All materials used help ensure product-neutral filtration without adsorption or particle migration.



#### Materials

<b>Filter material:</b>	Polypropylene
<b>Cage, core</b>	Polypropylene
<b>End cap/adapter:</b>	Polypropylene, adapter with reinforcing ring
<b>O-rings:</b>	Silicone (standard)


The plastic components meet the requirements of Directive 10/2011/EC and amendments. All materials used meet the FDA requirements according to 21 CFR § 177.1520.

## Technical Data

<b>Diameter:</b>	2.75 in (70 mm)
<b>Filter area:</b>	6.46 ft <sup>2</sup> (0.6 m <sup>2</sup> )/10"
<b>Max. operating temperature:</b>	176°F (80°C)
<b>Maximum differential pressure in flow direction:</b>	72.5 psid (500 kPa, 5.0 bar) at 68°F (20°C) 29.0 psid (200 kPa, 2.0 bar) at 176°F (80°C) 7.25 psid (50 kPa, 0.5 bar) at 250°F (121°C)
<b>Maximum differential pressure against flow direction:</b>	29.0 psid (200 kPa, 2.0 bar) at 68°F (20°C)
<b>Hot water sanitization:</b>	Max. 194°F (90°C), 30 minutes
<b>Steam sterilization:</b>	Max. 250°F (121°C)
<b>Chemical sterilization:</b>	With conventional chemical cleaners

## Flow Rate

10" (250 mm) element with water at 68°F (20°C) (standard values)

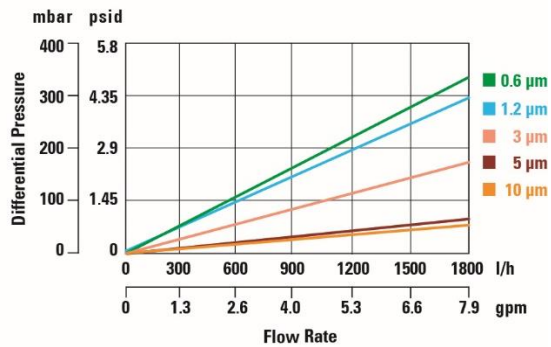

## Filter Cartridges Types/Retention Ratings

Type	Retention rating (µm)
PPPB6	0.6
PPP01	1.2
PPP03	3.0
PPP05	5.0
PPP10	10.0

## Adapter Codes

Code 0	Code 2
Single open end (SOE) 2-222 O-ring without spear	Single open end (SOE) 2-222 O-ring triple bayonet adapter with spear



## Code 7

Single open end (SOE)  
2-226 O-ring  
double bayonet adapter  
with spear



## Ordering Information

BECO PROTECT PP Pure depth filter cartridges with protective foil in carton.

Type	Retention rating	Adapter	Nominal length	Gasket
PPP	B6 = 0.6 µm	0 = Code 0 (SOE)*	1 = 10" (250 mm)	S = Silicone
	01 = 1.2 µm	2 = Code 2 (SOE)*	2 = 20" (500 mm)*	V* = Fluorelastomer
	03 = 3.0 µm	7 = Code 7 (SOE)	3 = 30" (750 mm)	
	05 = 5.0 µm		4 = 40" (1000 mm)*	
	10 = 10.0 µm			

\* on request

### Example

PPP	B6	7	1	S
-----	----	---	---	---

BECO PROTECT PP Pure depth filter cartridges; 0.6 µm retention rating; Code 7, 10" (250 mm); silicone gasket

### Sterilization

#### Steam sterilization

BECO PROTECT PP Pure depth filter cartridges can be steamed or autoclaved at 250 °F (121 °C) max.

Duration: 30 minutes after steam emerges from all openings of the filtration system.

Hot water sanitization or chemical cleaning via CIP with conventional cleaners is also possible.

### Safety

When used as directed and handled correctly, there are no known unfavorable effects associated with this product. BECO PROTECT PP Pure depth filter cartridges do not require the provision of safety-relevant information.

Storage, handling and transport does not present any environmental and health risks.

### Disposal

BECO PROTECT PP Pure depth filter cartridges should be treated as industrial waste. Any local and other official regulations in relation to the filtered product must be followed.

### Storage

Store filter cartridges in their original packaging and in a dry, odor-free and UV ray protected place.

Use filter cartridges within 60 months after production date.

### Certified Quality

During the production process, BECO PROTECT PP Pure depth filter cartridges are regularly monitored to ensure consistently excellent quality control.

**North America**  
44 Apple Street  
Tinton Falls, NJ 07724  
Toll Free: 800 656-3344  
(North America only)  
Tel: +1 732 212-4700

**Greater China**  
No. 7, Lane 280,  
Linhong Road  
Changning District, 200335  
Shanghai, P.R. China  
Tel: +86 21 5200-0099

**Europe/Africa/Middle East**  
Auf der Heide 2  
53947 Nettersheim, Germany  
Tel: +49 2486 809-0  
Friedensstraße 41  
68804 Altlußheim, Germany  
Tel: +49 6205 2094-0  
An den Nahewiesen 24  
55450 Langenlonsheim, Germany  
Tel: +49 6704 204-0

**Asia-Pacific**  
100G Pasir Panjang Road  
#07-08 Interlocal Centre  
Singapore 118523  
Tel: +65 6825-1668

**For more information, please  
email us at [filtration@eaton.com](mailto:filtration@eaton.com)  
or visit [www.eaton.com/filtration](http://www.eaton.com/filtration)**

EN  
1 A 4.3.7.2  
10-2021

© 2021 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.