



**PARTS TO CONNECT TO WIRING OR THE PROCESS**

COMPRESSION FITTINGS			
For 1/8" diameter sheath			
Part Number	NPT	Body/Nut	Ferrule
<b>PF38</b>	1/8"	304 stst	304 stst
<b>PF39</b>	1/8"	304 stst	Teflon®
<b>PF40</b>	1/4"	304 stst	304 stst
<b>PF41</b>	1/4"	304 stst	Teflon®
For 3/16" diameter sheath			
<b>PF52</b>	1/8"	304 stst	304 stst
<b>PF53</b>	1/8"	304 stst	Teflon®
<b>PF54</b>	1/8"	Brass	Brass
<b>PF55</b>	1/4"	304 stst	304 stst
<b>PF56</b>	1/4"	304 stst	Teflon®
<b>PF59</b>	1/2"	304 stst	304 stst
<b>PF60</b>	1/2"	304 stst	Teflon®
For 1/4" diameter sheath			
<b>PF63</b>	1/8"	304 stst	304 stst
<b>PF65</b>	1/4"	304 stst	304 stst
<b>PF66</b>	1/4"	304 stst	Teflon®
<b>PF67</b>	1/4"	Teflon®	Teflon®
<b>PF68</b>	1/4"	Brass	Brass
<b>PF73</b>	1/2"	304 stst	304 stst
<b>PF74</b>	1/2"	304 stst	Teflon®
<b>PF75</b>	1/2"	Brass	Brass
<b>PF76</b>	1/2"	Teflon®	Teflon®




PF38 to PF75

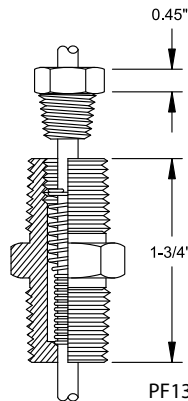



PF13 to PF18

SPRING-LOADED FITTINGS			
Standard, Non-sealed			
Part Number	Process Conn.	Conduit Conn.	Sensor Diameter
<b>PF13</b>	1/2" NPT	1/2" NPT	3/16"
<b>PF14</b>	1/2" NPT	1/2" NPT	1/4"
<b>PF17</b>	3/4" NPT	3/4" NPT	3/16"
<b>PF18</b>	3/4" NPT	3/4" NPT	1/4"
O-Ring Sealed*			
<b>PF21</b>	1/2" NPT	1/2" NPT	3/16"
<b>PF22</b>	1/2" NPT	1/2" NPT	1/4"
<b>PF25</b>	3/4" NPT	3/4" NPT	3/16"
<b>PF26</b>	3/4" NPT	3/4" NPT	1/4"
Notes:			
1. Maximum pressure rating 15 psi			
2. Buna N O-ring rated for -23 to 93°C (-10 to 200°F)			

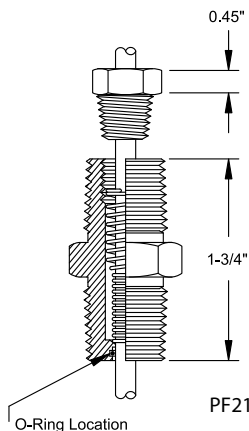

PF21 to PF26

PLUGS AND JACKS	
(Note: specify J, K, E or T calibration. e.g., PT05-J)	
<b>PT05</b>	Standard plug, rated to 177°C (350°F)
<b>PT06</b>	Standard jack, rated to 177°C (350°F)
<b>PT07</b>	High Temp. plug, rated to 260° (500°F)
<b>PT08</b>	High Temp. jack, rated to 260° (500°F)
<b>PT09</b>	Miniature plug, rated to 177°C (350°F)
<b>PT10</b>	Miniature jack, rated to 177°C (350°F)
<b>PA9</b>	Rubber boot for use with PT05/PT06
<b>PA10</b>	Cable clamp for PT05 to PT08
<b>PA11</b>	Neoprene bushing for use with PA10 to prevent wire abrasion

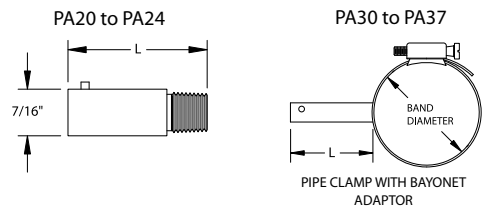

BAYONET ADAPTERS (PLATED STEEL)		
Part Number	Thread Size	Length (L)
<b>PA20</b>	1/8" - 27 NPT	7/8"
<b>PA21</b>	1/8" - 27 NPT	1"
<b>PA22</b>	1/8" - 27 NPT	1-1/2"
<b>PA23</b>	1/8" - 27 NPT	2"
<b>PA24</b>	1/8" - 27 NPT	2-1/2"
PIPE CLAMP AND BAYONET ADAPTERS		
Part Number	Band Diameter	Adapter Length (L)
<b>PA30</b>	1-1/4" to 2-1/4"	1"
<b>PA31</b>	1-1/4" to 2-1/4"	2"
<b>PA32</b>	2-1/4" to 3-1/4"	1"
<b>PA33</b>	2-1/4" to 3-1/4"	2"
<b>PA34</b>	3-1/4" to 4-1/4"	1"
<b>PA35</b>	3-1/4" to 4-1/4"	2"
<b>PA36</b>	4-1/4" to 5"	1"
<b>PA37</b>	4-1/4" to 5"	2"