

INLINE flowmeter with paddle wheel, ELEMENT design



- Size of measurement pipes: DN06 to DN65
- Configurable outputs: one or two transistor output(s) and single or dual 4...20 mA analog output(s)
- Removable backlit display/configuration module for indication of flow rate and volume with two flow totalizers
- Automatic calibration using Teach-In, all outputs can be checked without the need of actual flow


Type 8036 can be combined with...




Type 8619
multiCELL
transmitter/controller




Type 8611
Universal process
controller eCONTROL



Type 8644
Valve islands



Type 2101 (8692)
ELEMENT control
valve system



Type 2030
On/Off diaphragm
valve

The Bürkert flowmeter Type 8036 is a compact device, specially designed for measuring the flow rate in solid-free liquids, in a variety of applications (water, waste water monitoring, chemical processing etc.).

Type 8036 is available with:


- 2 configurable outputs: one transistor output (NPN) and one 4...20 mA current output (2-wire)
- 3 configurable outputs: two transistor outputs (NPN/PNP) and one 4...20 mA current output (2-wire)
- 4 configurable outputs: two transistor outputs (NPN/PNP) and two 4...20 mA current outputs (3-wire).

Type 8036 converts the measured signal, displays different values in different units (if display/configuration module mounted) and computes the output signals, which are provided via one or two M12 fixed connectors. Thanks to 1 or 2 transistor outputs, the flowmeter can be used to switch a solenoid valve, activate an alarm and, thanks to 1 or 2 current outputs, establish one or two control loops.

| General data | |
|---------------------------------|--|
| Compatibility | Any pipe from DN06...DN65 which are fitted out with Bürkert INLINE sensor-fitting S030 (see corresponding datasheet) |
| Materials | See exploded view, on next page |
| Housing | Stainless steel 1.4404, PPS |
| Cover | PC |
| Seals | EPDM, silicone |
| Screws | Stainless steel |
| Fixed connector mounting plate | Stainless steel 1.4404 (316L) |
| Fixed connector | Brass nickel plated (stainless steel on request) |
| Display | PC |
| Navigation key | PBT |
| Quarter turn system | PC |
| Wetted parts | |
| Sensor-fitting, sensor armature | Brass, stainless steel 1.4404/316L, PVC, PP or PVDF |
| Seal | FKM or EPDM (depending on S030 version) |
| Axis and bearings | Ceramics (Al ₂ O ₃) |
| Paddle wheel | PVDF |
| Display (accessories) | Grey dot matrix 128 x 64 with backlighting |
| Electrical connections | |
| 2 or 3 outputs transmitter | 1 x 5-pin M12 male fixed connector |
| 4 outputs transmitter | 1 x 5-pin M12 male and 1 x 5-pin M12 female fixed connectors |
| Connection cable | Shielded cable |
| Environment | |
| Ambient temperature | -10...+60°C (+14...+140°F) (operating and storage) |
| Relative humidity | ≤ 85%, without condensation |

8036 / SE36 ELEMENT

bürkert

| Complete device data (Sensor-fitting S030 + transmitter SE36) | |
|--|---|
| Pipe diameter | DN06...DN65 |
| Measuring range | 0.3...10 m/s |
| Medium temperature with sensor-fitting in PVC/ PP PVDF, brass or stainless steel | 0...+50°C (+32...+122°F) / 0...+80°C (+32...+176°F) -15...+100°C (+5...+212°F) |
| Medium pressure max. | PN10 (145 PSI) (with plastic sensor-fitting) - PN16 (232 PSI) (with metal sensor-fitting) - (PN40 on request, see S030 datasheet) - see pressure/temperature chart |
| Viscosity / Particles rate | 300 cSt max. / 1% max. |
| Measurement deviation ²⁾ Teach-In Standard K-factor | ±1% of the measured value (at Teach-In flow rate value) ¹⁾ ±2.5% of the measured value ¹⁾ |
| Linearity | ±0.5% of F.S.* ¹⁾ |
| Repeatability | ±0.4% of the measured value ¹⁾ |
| Electrical data | |
| Power supply 2 or 3 outputs transmitter (2-wire) 4 outputs transmitter (3-wire) | 14...36 V DC, filtered and regulated 12...36 V DC, filtered and regulated |
| Characteristics of the power source (not provided) of UL recognized devices | Limited power source (according to § 9.4 of the UL61010-1 standard) or, Class 2 type power source (according to the 1310/1585 and 60950-1 standards) |
| Current consumption with sensor 2 or 3 outputs transmitter (2-wire) 4 outputs transmitter (3-wire) | ≤ 1 A (with transistors load) ≤ 25 mA (at 14 V DC without transistors load, with current loop) ≤ 5 mA (at 12 V DC without transistors load, without current loop) |
| Power consumption | 40 W max. |
| Protection | Reversed polarity of DC: protected Voltage peak: protected Short circuit: protected for transistor outputs |
| Output Transistor 1 transistor output (transmitter 2-wire) 2 transistor outputs (transmitter 2 or 3-wire) Current 1 current output (transmitter 2-wire) 2 current outputs (transmitter 3-wire) | NPN, open collector, 1...36 V DC, max. 700 mA Adjustable as sourcing or sinking (respectively both as PNP or NPN), open collector, max. 700 mA, 0.5 A max. per transistor if the 2 transistor outputs are wired NPN-output: 1...36 V DC PNP-output: Power supply 4...20 mA adjustable as sourcing or sinking (in the same mode as transistor), max. loop impedance: 1100 Ω at 36 V DC ; 610 Ω at 24 V DC; 180 Ω at 14 V DC max. loop impedance: 1100 W at 36 V DC; 610 Ω at 24 V DC; 100 Ω at 12 V DC |
| 4...20 mA output uncertainty | ±1% |
| Standards, directives and certifications | |
| Protection class | IP65, IP67 (according to EN60529) with device wired and M12 cable plug mounted and tightened and cover fully screwed down |
| Standards and directives CE | The applied standards, which verify conformity with the EU Directives, can be found on the EU Type Examination Certificate and/or the EU Declaration of conformity (if applicable) |
| Pressure | Complying with article 4, §1 of 2014/68/EU directive* |
| Certification UL-Recognized for US and Canada  | UL61010-1 + CAN/CSA-C22.2 No.61010-1 |

¹⁾ Under reference conditions i.e. measuring fluid = water, ambient and water temperature = 20°C (68°F), while maintaining the minimum inlet and outlet distances and the appropriate internal diameter of the pipes.


* F.S. = Full scale (10 m/s)

²⁾ = "measurement bias" as defined in the standard JCGM 200:2012




If the device is mounted in a humid environment or outside, then the maximum allowed voltages are **35 V DC** instead of 36 V DC.

Pressure/temperature chart

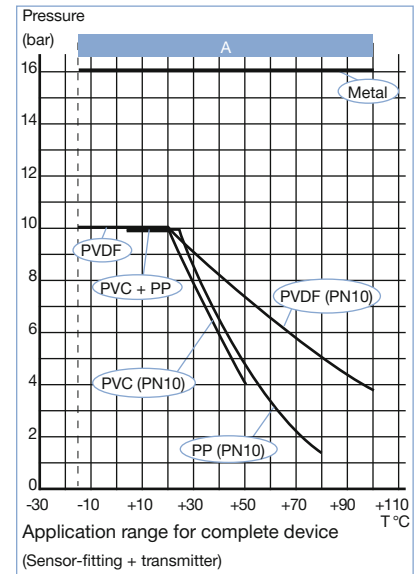

Materials view

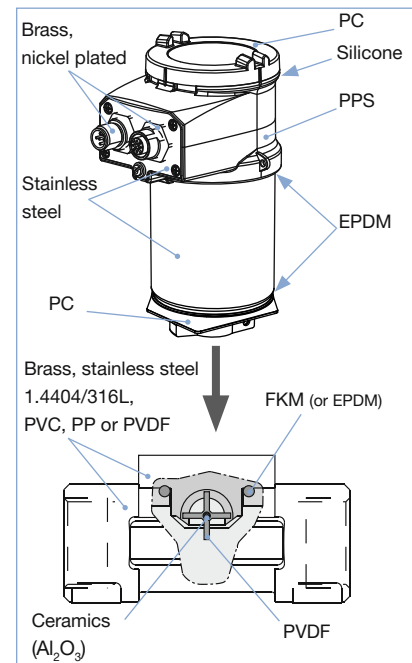


* For the 2014/68/EU pressure directive, the device can only be used under the following conditions (depends on max. pressure, pipe diameter and fluid).

| Type of Fluid | Conditions |
|-----------------------------------|-------------------------------------|
| Fluid group 1, article 4, §1.c.i | DN ≤ 25 |
| Fluid group 2, article 4, §1.c.i | DN ≤ 32 or PN*DN ≤ 1000 |
| Fluid group 1, article 4, §1.c.ii | DN ≤ 25 or PN*DN ≤ 2000 |
| Fluid group 2, article 4, §1.c.ii | DN ≤ 200 or PN ≤ 10 or PN*DN ≤ 5000 |

Design and operating principle

The device 8036 is made up of a compact INLINE sensor-fitting (S030) equipped with a sensor with paddle wheel and an enclosure with cover containing the electronic module (SE36). A removable display/configuration module completes this flowmeter. The flowmeter can operate without the display/configuration module, but it will be required for configuration of the device (i.e. set parameters, restore default parameters, enter information to be displayed, enter access codes, adjust 4...20 mA output(s) ...) and also for visualizing continuously the measured and processed data.




When liquid flows through the pipe, the paddle wheel with 4 inserted magnets is set in rotation, producing a measuring signal in the sensor (Hall sensor). The frequency modulated induced voltage is proportional to the flow velocity of the fluid.

A conversion coefficient (K-factor, available in the instruction manual of the S030 sensor-fitting), specific to each pipe (size and material) enables the conversion of this frequency into flow rate.

The electronic component converts the measured signal into several outputs (according to the flowmeter version) and displays the actual value. Totalizers are used to obtain the volume of fluid passed through the pipe.

Installation




The sensor-fitting (S030) ensures simple installation into pipes from DN06...DN65. The transmitter SE36 can easily be installed into any Bürkert INLINE sensor-fitting system (S030), by means of a quarter turn.


Minimum straight upstream and downstream distances must be observed. According to the pipe's design, necessary distances can be bigger or use a flow conditioner to obtain the best accuracy. For more information, please refer to EN ISO 5167-1.

EN ISO 5167-1 prescribes the straight inlet and outlet distances that must be complied with when installing fittings in pipe lines in order to achieve calm flow conditions. The most important layouts that could lead to turbulence in the flow are shown below, together with the associated prescribed minimum inlet and outlet distances.

These ensure calm, problem-free measurement conditions at the measurement point.

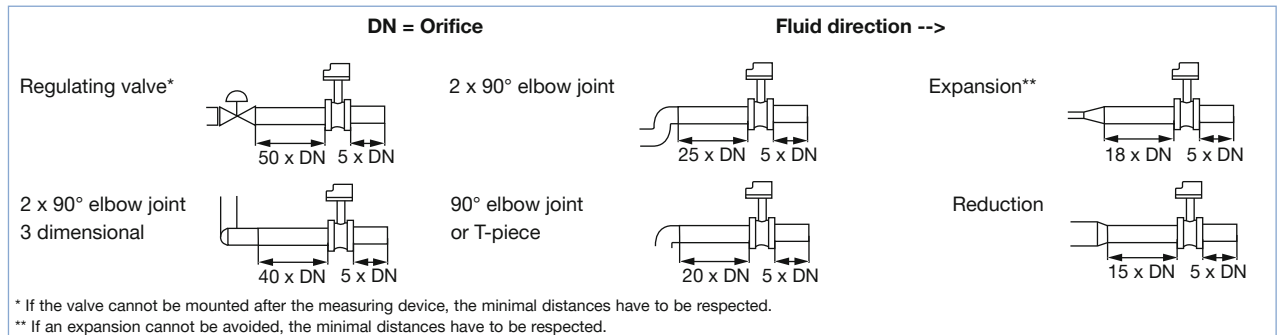

The flowmeter can be installed into either horizontal or vertical pipes.

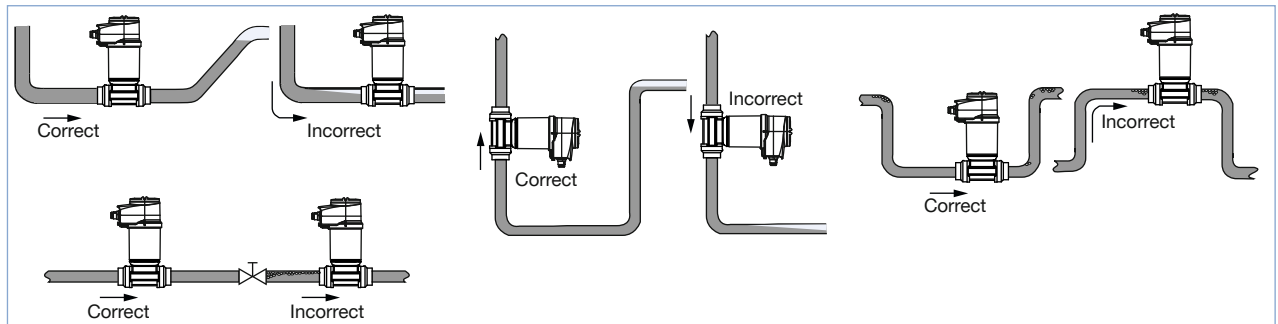


Pressure and temperature ratings must be respected according to the selected sensor-fitting material. The suitable pipe size is selected using the diagram Flow/Velocity/DN. The flowmeter is not designed for gas flow measurement.

Selection of sensor-fitting/pipe size

Example:

- Specification of nominal flow: 10 m³/h
- Ideal flow velocity: 2...3 m/s

For these specifications, the diagram indicates a pipe size of DN40 (or DN50 for (*) mentioned sensor-fittings)

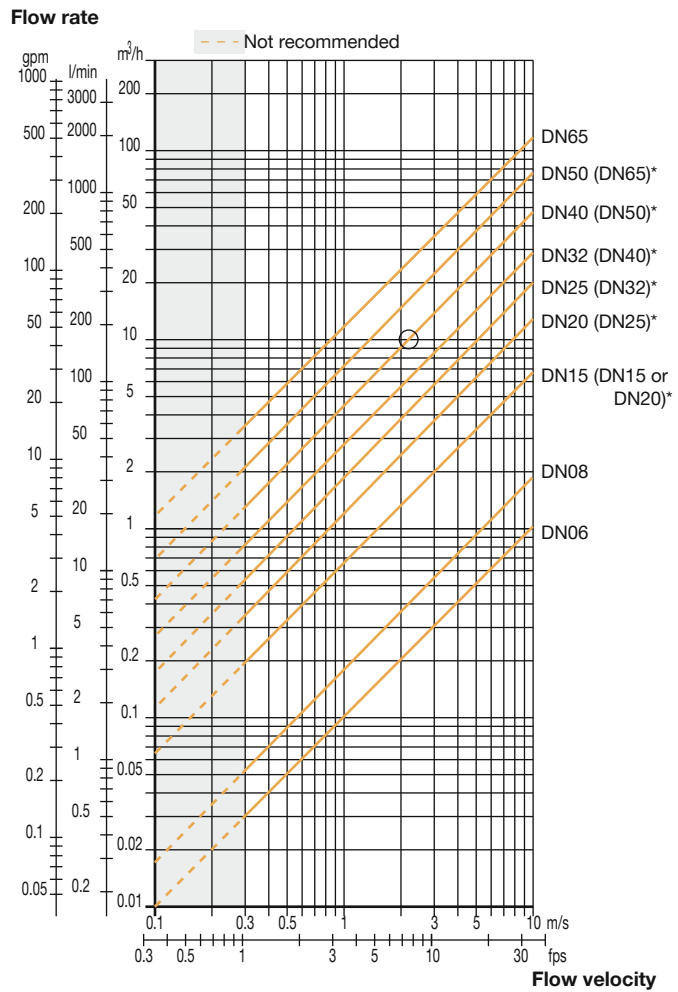


* for following sensor-fittings with:


- external threads acc. to SMS 1145
- weld ends acc. to SMS 3008, BS4825-1/ASME BPE/DIN 11866 series C or DIN 11850 series 2/DIN 11866 series A/DIN EN 10357 series A
- Clamp acc. to SMS 3017, BS 4825-3/ASME BPE or DIN 32676 series A

Dimensions [mm] of flowmeter Type 8036

Transmitter SE36

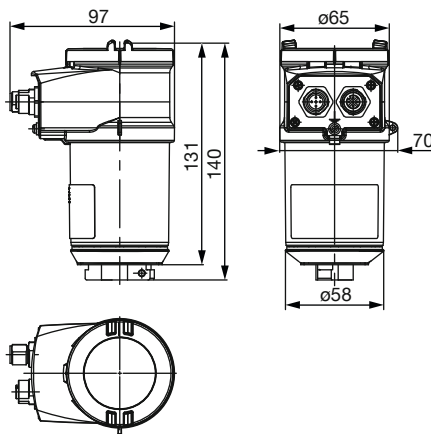

Flowmeter



| DN | H with S030 sensor-fitting |
|----|----------------------------|
| 06 | 162 |
| 08 | 162 |
| 15 | 167 |
| 20 | 165 |
| 25 | 165 |
| 32 | 168 |
| 40 | 172 |
| 50 | 179 |
| 65 | 179 |

Ordering information for compact flowmeter Type 8036

A complete flowmeter Type 8036 consists of a compact flow ELEMENT transmitter Type SE36, a removable display/configuration module and a Bürkert INLINE sensor-fitting Type S030.

The following information is necessary for the selection of a complete device:

- Item no. of the desired compact flow transmitter **Type SE36** (see ordering chart on p. 6)
- Item no. of the selected INLINE sensor-fitting **Type S030** (see separate datasheet)

You always have to order the two components separately.










Attention!

When you order devices without the display/configuration module, please take care that you also order at least one display/configuration module for the operation.




Order no. of the removable display/configuration module (see ordering chart on p.6)

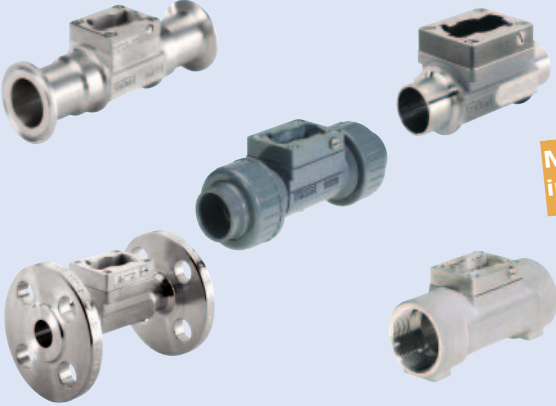When you click on the orange box “More info.” below, you will come to our website for the resp. product where you can download the datasheet.

Example

| | | |
|---|--|---|
| <p>Compact transmitter with display/ configuration module Type SE36</p>  | | <p>Complete flowmeter Type 8036</p>  |
| <p>Compact transmitter without display/ configuration module Type SE36</p>  | <p>Removable display/configu- ration module</p>  | |
| <p>INLINE sensor-fitting Type S030</p>  | |  |
| <p>More info.</p> | |  |





Ordering chart for compact flow transmitter Type SE36

| Specification | Voltage supply | Output | Electrical connection | UL certification | Item no. without display/ configuration module | Item no. with display/ configuration module |
|---------------|----------------|---|---|---|--|---|
| 2 outputs | 14...36 V DC | 1 x transistor NPN + 1 x 4...20 mA (2 wires) | 5-pin M12 male fixed connector | No | 560 880 | 561 880 |
| | | | |  Recognized | 560 883 | 561 883 |
| 3 outputs | 14...36 V DC | 2 x transistors NPN/PNP + 1 x 4...20 mA (2 wires) | 5-pin M12 male fixed connector | No | 560 881 | 561 881 |
| | | | |  Recognized | 560 884 | 561 884 |
| 4 outputs | 12...36 V DC | 2 x transistors NPN/PNP + 2 x 4...20 mA (2 wires) | 5-pin M12 male and 5-pin M12 female fixed connectors | No | 560 882 | 561 882 |
| | | | |  Recognized | 560 885 | 561 885 |


Note: Order separately (see accessories)

- M12 cable plugs (only female for one 4...20 mA output, 1 male + 1 female for two 4...20 mA outputs flowmeter)

Ordering chart - accessories (has to be ordered separately)

| Specification | Item no. |
|--|----------|
| Removable display/configuration module (with instruction sheet) | 559 168 |
| Blind cover with seal (1 screw cover with EPDM seal + 1 quarter turn closing cover with silicone seal) | 560 948 |
| Transparent cover with seal (1 screw cover with EPDM seal + 1 quarter turn closing cover with silicone seal) | 561 843 |
|  5 pin M12 female straight cable plug with plastic threaded locking ring, to be wired | 917 116 |
|  5 pin M12 male straight cable plug with plastic threaded locking ring, to be wired | 560 946 |
|  5 pin M12 female straight cable plug moulded on cable (2 m, shielded) | 438 680 |
|  5 pin M12 male straight cable plug moulded on cable (2 m, shielded) | 559 177 |

Interconnection possibilities with other Bürkert devices

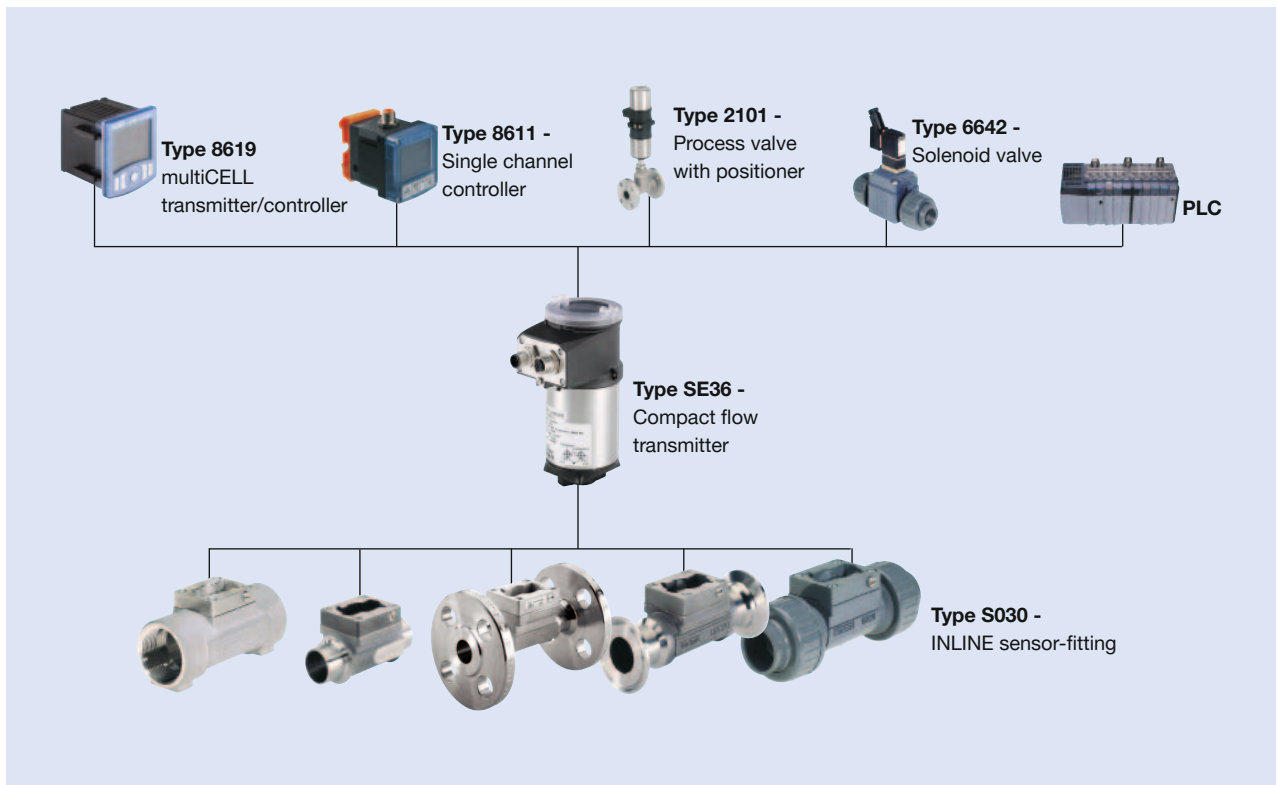

DTS 1000128709 EN Version: L Status: RL (released | freigegeben | validé) printed: 22.09.2017

To find your nearest Bürkert facility, click on the orange box →

www.burkert.com

In case of special application conditions,
please consult for advice.

Subject to alteration.
© Christian Bürkert GmbH & Co. KG

1703/11_EU-en_00895130