



## MERCMASTER™ III LOW PROFILE LUMINAIRES — CANADA

- Compact light weight low profile design is suited for low mounting heights in conjunction with lower wattage fixtures.
- Modular design allows scores of fixture component combinations to meet installation and lighting needs. Uses same mounting hoods and optical accessories as Mercmaster III.
- A choice of heat-resistant prismatic glass refractors (NEMA I, III or V) or heat-resistant globes which thread directly into ballast housing. Photometrics available upon request – contact your local sales representative.
- Standard dome or 30° angle reflectors made of fiberglass reinforced white polyester. Highly resistant to corrosive atmospheres.
- Accommodates medium base lamps.
- A wide range of voltages available (120 to 600 Volt) and ballast types (Reactor, CWA, CWI and Super CWA).
- Medium base lamp type and watts:
  - HPS 50 W-150 W
  - PSMH 50 W-175 W ①
- Hinge has high lip for added safety during installation and servicing. Hinge and bolt construction assures 360° compression at all points on ballast housing gasket for positive sealing. Swing away design of captive bolt and nut simplifies servicing.
- All Mercmaster III mounting hoods have provision for easy field installation of fuses in fixtures (see fuse kits).
- Fixtures are for use in Class I, Zone 2 hazardous locations.
- The Ex nR factory sealed Mercmaster III prevents vapors and gases from entering the globe chamber. There are no seals or putty required which will reduce installation time and installation errors.

### SUITABLE LOCATIONS

- Enclosed and gasketed fixtures suitable for use in:
  - Marine and wet locations
  - A wide range of industrial, chemical processing and other areas where flammable gases and vapors or combustible dusts are present under conditions defined by the National Electrical Code as Class I, Division 2; Class II, Division 1 and 2; and Class III
  - Areas of low clearance, low ceiling heights or where fixture weights must be minimized
  - For Zone 2, the method of protection is Ex nR – Restricted Breathing
  - Non-hazardous locations where severe weather conditions, excessive moisture, dirt, dust, corrosive atmosphere or high ambient temperatures are encountered
- Typical applications include:
  - Pulp and paper mills
  - Processing plants
  - Chemical plants
  - Oil refineries
  - Foundries
  - Manufacturing plants
  - Storage areas
  - Waste and sewage treatment
  - Parking garages
  - Other areas where dust, water, dirt and rough usage are a problem

### STANDARD MATERIALS

- Mounting hoods, bodies and guard: cast copperfree (4/10 of 1% max.) aluminum
- All hardware and catch assemblies: stainless steel
- Reflectors: Fiberglass reinforced white polyester
- Globes and Refractors: heat-resistant prismatic glass

### STANDARD FINISHES

- Mounting hoods, bodies and guards: baked gray epoxy-clad finish, electrostatically applied for complete uniform protection

### CEC RATINGS

Class I, Division 2, Groups A, B, C, D  
Class I, Zone 2 Ex nR IIC (Z)  
Class II, Division 1 and 2, Groups E, F, G  
Class III  
Type 4X  
IP66

① Mercury vapor and metal halide luminaires are not available for purchase within the United States. Please check with your countries governing legislation regarding allowable lamp types before ordering.



For product information:  
[www.appletonelec.com](http://www.appletonelec.com)  
1.800.621.1506



EMERSON. CONSIDER IT SOLVED.™


**OPTIONS**

- Quartz Auxiliary comes to full brightness immediately and remains lit until the HID lamp attains 60-70% of full illumination. Quartz Auxiliary supplied with relay switch and socket to accept 120 V quartz double-contact bayonet base lamp (not included). Add suffix -E ①.
- Guards with gray epoxy painted to match fixtures, supplied with stainless steel screws. Add suffix -G before voltage suffix.
- Hot Restrike to restrike HPS lamp immediately when power is restored after a momentary power interruption. Add suffix -R.

- Smart Starter incorporates a 1-1/2 minute timer and performs as a conventional starter to normally start lamp. Removes itself from circuit if lamp burns out or is removed from socket. Eliminates starter failures caused by prolonged operation with cycling or failing lamps and simplifies finding their location, reducing maintenance and repair costs. Available for all fixtures. Add suffix -S.
- Ex nR fixtures, add suffix -Z.
- Reflectors are available as standard dome and 30° angle polyester. Order separately.

**CEC CERTIFICATIONS AND COMPLIANCES ②**

- CSA Certified: 025428
- CSA Standard: CSA C22.2 No. 9, C22.2 No. 137; CAN/CSA E60079-0, E60079-15

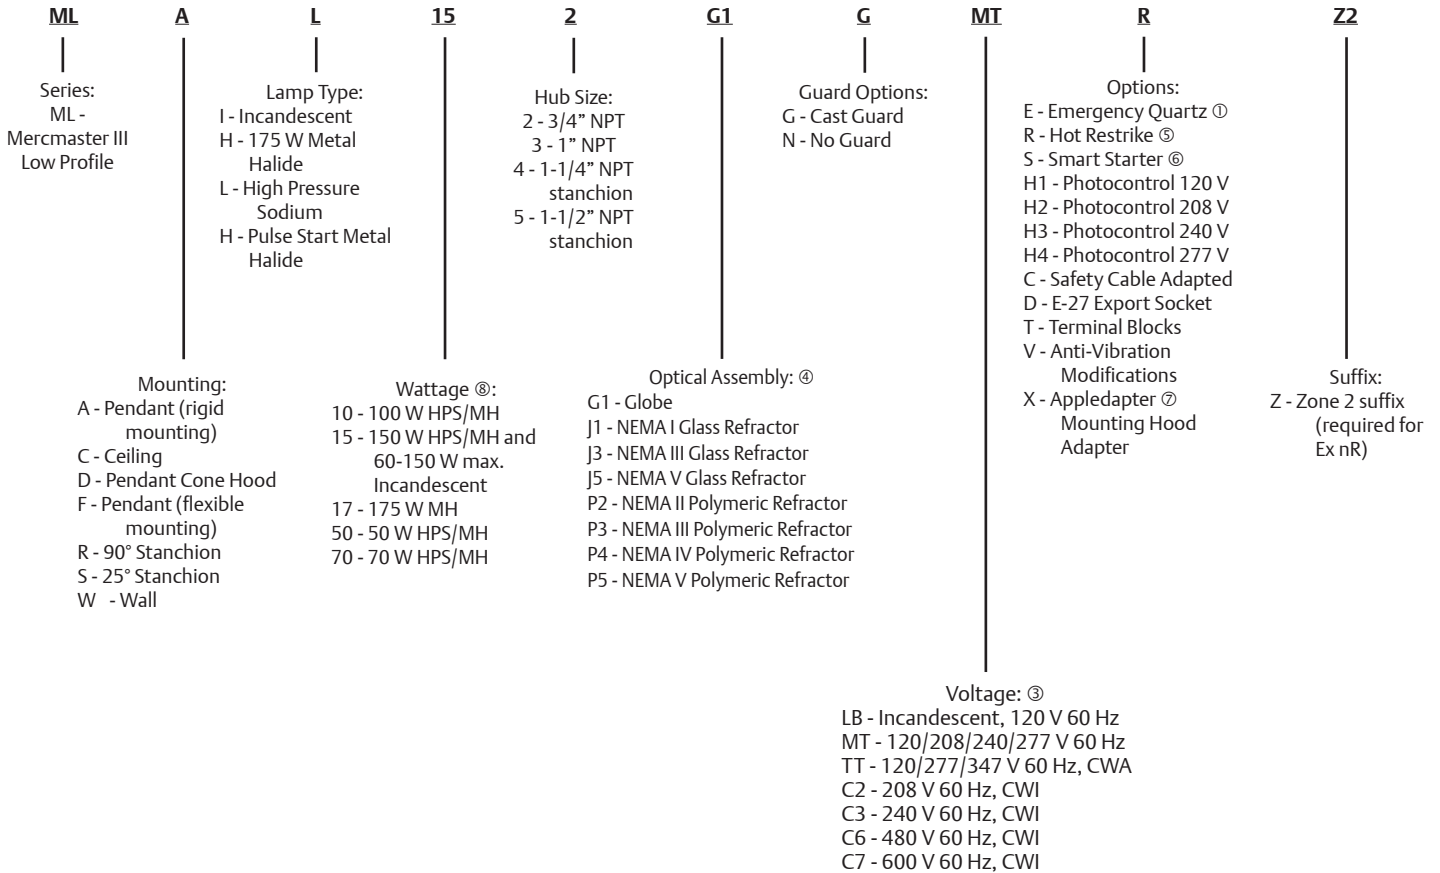

① Fixtures equipped with quartz auxiliary lamp do not comply with CEC requirements and are not suitable for use in classified locations.  
 ② Compliance data varies for specific fixtures. Consult Appleton regarding suitability of specific fixtures for a particular application.  
 ③ Other voltages, frequencies available – contact your local sales representative. Voltages shown are limited to specific combinations; refer to following pages.  
 ④ Polymeric Refractor suitable for Class II, Groups F and G and NEMA 4X only (100 W PSMH Max.). Reflectors ordered separately.  
 ⑤ Available for 50-150 W HPS fixtures only.  
 ⑥ Available for HPS fixtures.  
 ⑦ Appledapter is available for use with the pendant, ceiling and angled stanchion mounting only.  
 ⑧ Mercury vapor and metal halide luminaires are not available for purchase within the United States. Please check with your countries governing legislation regarding allowable lamp types before ordering.



United States: 1.800.621.1506 | Asia/Pacific: + 65.6556.1100 | Australia: + 61.3.9721.0348  
 Canada: + 1.888.765.2226 | China: + 86.21.3338.7000 | Europe: + 33.3.22.54.13.90  
 Mexico/Latin America: + 52.55.5809.5049 | Middle East/Africa/India: + 971.4.811.8100  
 www.appletonelec.com

