

# JB and GS Flexible Fixture Hangers

Malleable Iron. Ball Type, 15° Swing; Cushion Type, 8° Swing

UNILETS® for Use with Threaded Rigid Metal Conduit and IMC.

**NEC/CEC:**

Listed for Ordinary (Unclassified) Locations

**Applications**

- JB, GS and AHG cushion hangers are enclosed and gasketed— ideal where dust and dampness are present.
- JB and GS hangers designed for use with JB and GS boxes.

**Features**

- All hangers
  - All fixture hangers protect fixture against wind and vibration damage.
  - Cushion type for added protection where lighting fixtures are subjected to vibration.
- JB and GS hangers
  - Mount directly to JB and GS cast conduit outlet boxes.
  - Choice of ball or cushion type.
  - Ball type permits 15° swing, cushion type 8° swing from vertical
  - Cushion type is enclosed and gasketed.

**Standard Materials**

- Malleable iron


**Standard Finishes**

- GS: triple-coat—(1) zinc electroplate, (2) chromate, and (3) epoxy powder coat
- JB series support: zinc electroplate and clear chromate

**NEC/CEC Certifications and Compliances**

- JB and GS cushion type hangers suitable for classified location use in Class I, Division 2 areas, if installed in compliance with NEC 501-9(b)
- CSA Certified: 065180
- UL Listed: E109438

**Illustrated Features**

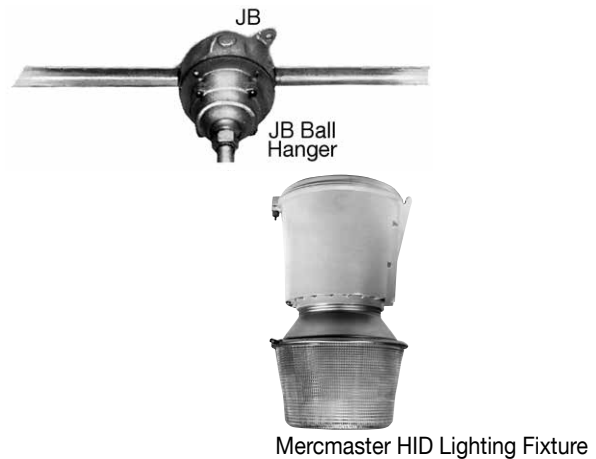


JBK-50-BS



JBK-50-CS



GSK-50-20B



GSK-50-20C

POLES/HANGERS: NEC/CEC ORDINARY LOCATION FLEXIBLE FIXTURE HANGERS



# JB and GS Flexible Fixture Hangers





Malleable Iron. Ball Type, 15° Swing; Cushion Type, 8° Swing

UNILETS® for Use with Threaded Rigid Metal Conduit and IMC.

NEC/CEC:

Listed for Ordinary (Unclassified) Locations

POLES/HANGERS: NEC/CEC ORDINARY LOCATION FLEXIBLE FIXTURE HANGERS

	Fixture Stem Size (Inches)	Male Nipple Size (Inches)	Length A mm (in)	Support Weight kg (lbs)	Catalog Number
<b>JB—Fixture Hanger Covers — For use with JBX, JBDX and JBLX bodies — Furnished with gasket and screws</b>					
	<b>Ball Type</b>				
	1/2		65.0 (2.56)	113 (250)	<b>JBK-50-BS</b>
3/4		65.0 (2.56)	<b>JBK-75-BS</b>		
	<b>Cushion Type</b>		Enclosed and gasketed. Cushions 18.0 kg. (40 lbs.)		
	1/2		41.4 (1.63)	18 (40)	<b>JBK-50-CS</b>
3/4		41.4 (1.63)	<b>JBK-75-CS</b>		
<b>GS—Fixture Hanger Covers (Form 20) — For use with GS and GSU bodies — Furnished with gasket and screws</b>					
	<b>Ball Type</b>				
	1/2		76.2 (3.00)	250 (113)	<b>GSK-50-20B</b>
3/4		82.6 (3.25)	<b>GSK-75-20B</b>		
	<b>Cushion Type</b>		Enclosed and gasketed. Cushions 18.0 kg. (40 lbs.)		
	1/2		50.8 (2.00)	40 (18)	<b>GSK-50-20C</b>
3/4		50.8 (2.00)	<b>GSK-75-20C</b>		