


Lubricator – Standard SL2

= "Most Popular"




SL2-04-LYV0

Features

- Stainless Steel Construction Handles Most Corrosive Environments
- 1/8" Female Threaded Drain
- Fillable Under Pressure
- Meets NACE Specifications MR-01-75/ISO 15156
- High Flow: 1/2" - 100 SCFM[§]

[§] SCFM = Standard cubic feet per minute at 90 PSIG inlet, and 5 PSIG pressure drop.

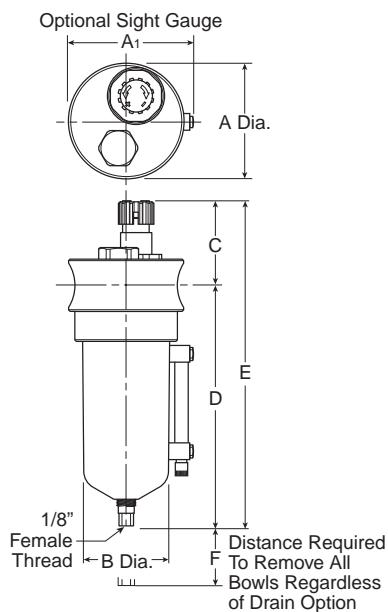

Specifications

Flow Capacity*	Port Size	100 SCFM
	1/2	
Bowl Capacity		4.0 Ounces
Port Threads		1/2 Inch

Pressure & Temperature Ratings –

Metal Bowl –	0 to 300 PSIG (0 to 20.7 bar)
	0°F to 150°F (-18°C to 66°C)
Metal Bowl with Sight Gauge –	0 to 250 PSIG (0 to 17.2 bar)
	0°F to 150°F (-18°C to 66°C)

Note: Air must be dry enough to avoid ice formation at temperatures below 32°F (0°C).

Useful Retention **	4 Ounces
Weight	1.9 lb. (0.85 kg)

* Inlet pressure 90 PSIG (6.2 bar) and 5 PSID (0.3 bar) pressure drop.

** Useful Retention refers to volume below the quiet zone baffle.

Materials of Construction

Body	316 Stainless Steel
Bowl	316 Stainless Steel
Dip Tube	316 Stainless Steel
Drain	316 Stainless Steel
Fill Plug	316 Stainless Steel
Seals	Fluorocarbon
Sight Dome	Nylon
Sight Gauge	Isoplast


Dimensions

Models	Inches (mm)	A	A ₁	B	C	D	E	F
Miniature Unit SL2-04-XXXX		2.36 (60)	2.52 (64)	1.73 (44)	2.17 (55)	5.46 (139)	7.62 (194)	3.50 (89)

= "Most Popular"

SL2 Filter Kits & Accessories

- Drain Kit –
 - Manual Twist Drain (New) SAP05481
 - Manual Twist Drain (Old)..... SRP-96-008
- Liquid Level Sight and Gauge Kit SRP-96-026
- Pipe Nipple – 1/2" 316 Stainless Steel.....SRP-96-010
- Sight Dome / Metering Screw Kit –
 - Old SRP-96-025
 - New Style Nylon..... LRP-96-720

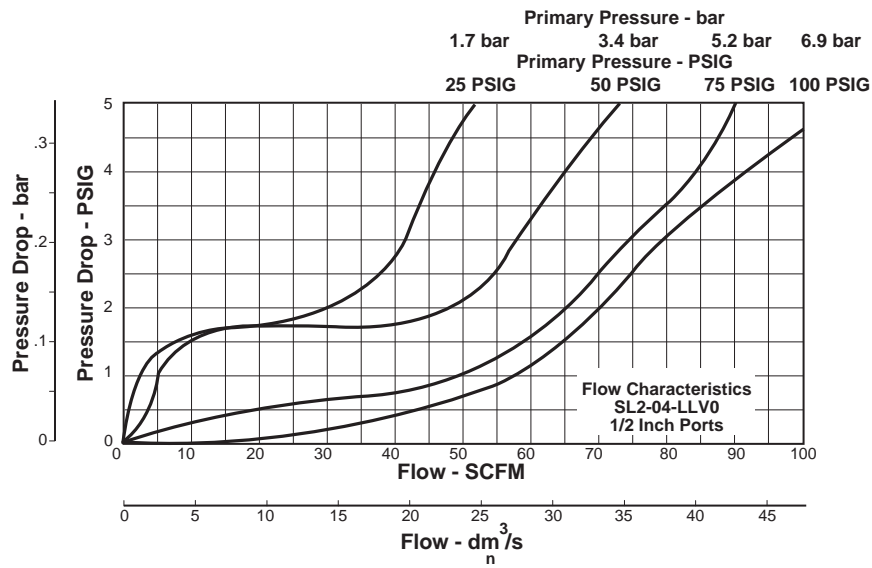

W
 Stainless Steel Products

Ordering Information

Model Type	Port Size	Model Number
Manual Drain	1/2	SL2-04-LYV0

Options - To order an option supplied with the unit model, add the appropriate coded suffix letter in the designated position of the model number.